



Protection - Control - Identification - Tracking - Rfid solutions

www.leghorngroup.com



Security seals and products for fire extinguishers

Made by LeghornGroup.



Uranus seal: seal without numbering

Product description:



- Polypropilene
- Marking not available
- Colours: yellow and red
- Further colours may be manufactured upon request

Packaging:

- Carton with 10000 seals

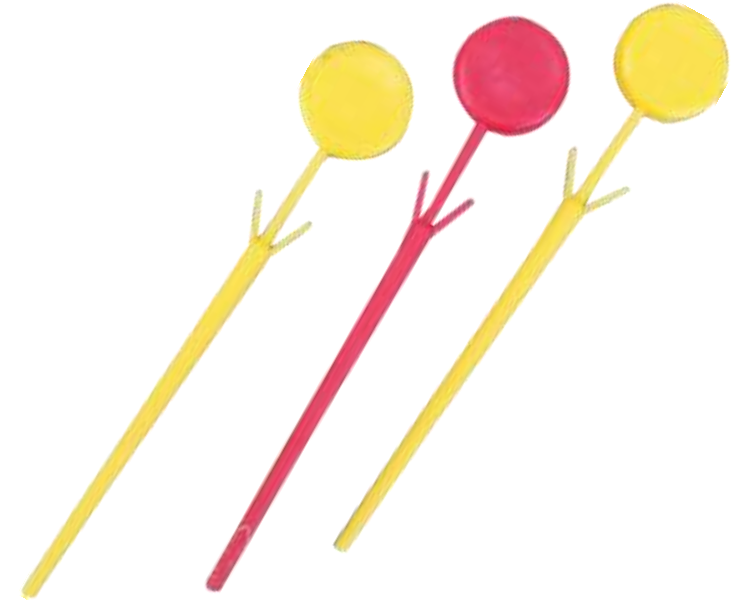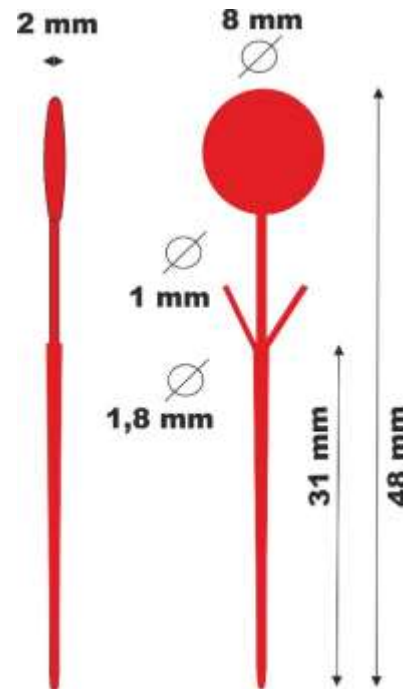

Plombex 9 mm: seal without numbering

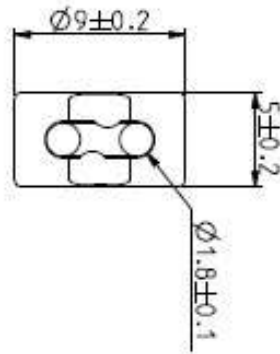

Product description

- Suitable pliers are required for the correct closure
- Diameter size: 9mm
- Customisation may be done with the appropriate plier
- Colours: orange, silver, ivory white, blue, yellow, grey, black, brown, red and green

Packaging:


- Carton with 10000 seals. Upon request, seals in plastic bags of 1000 pcs
- Carton size: 27x22x11cm
- Carton weight: 2.8 kg



Twiggyseal 2.2x190 mm: seal with numbering

Product description:

- Working temperature: -30°c +60°c
- Progressive numbering up to 15 digits
- Customisation up to 20 characters
- Colours: orange, light blue, white, yellow, red, blue green, black, pink, brown and grey

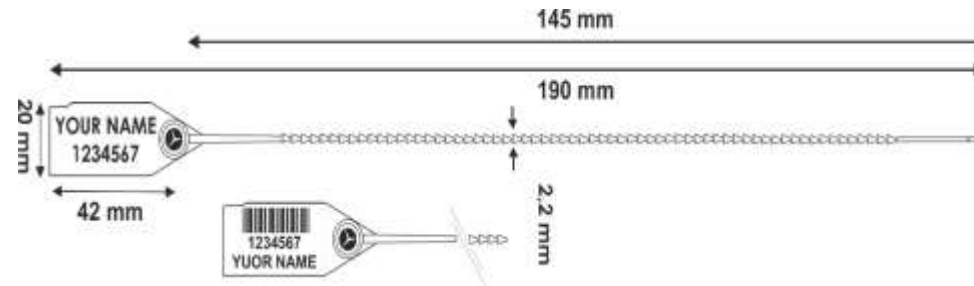

Imballo:

- Carton with 1000 seals in mats of 10 pcs
- Carton size: 40x24x17cm
- Carton weight: 1.7kg



Jupiterseal 1.3x225 mm: seal with numbering




Product description:

- Working temperature: -30°c +60°c
- Progressive numbering up to 15 digits
- Customisation up to 20 characters
- Colours: orange, light blue, white, yellow, red, blue, green, black, pink and violet.

Imballo:

- Carton with 1000 seals in mats of 10 pcs
- Carton size: 56x25x17cm
- Carton weight: 2.4kg

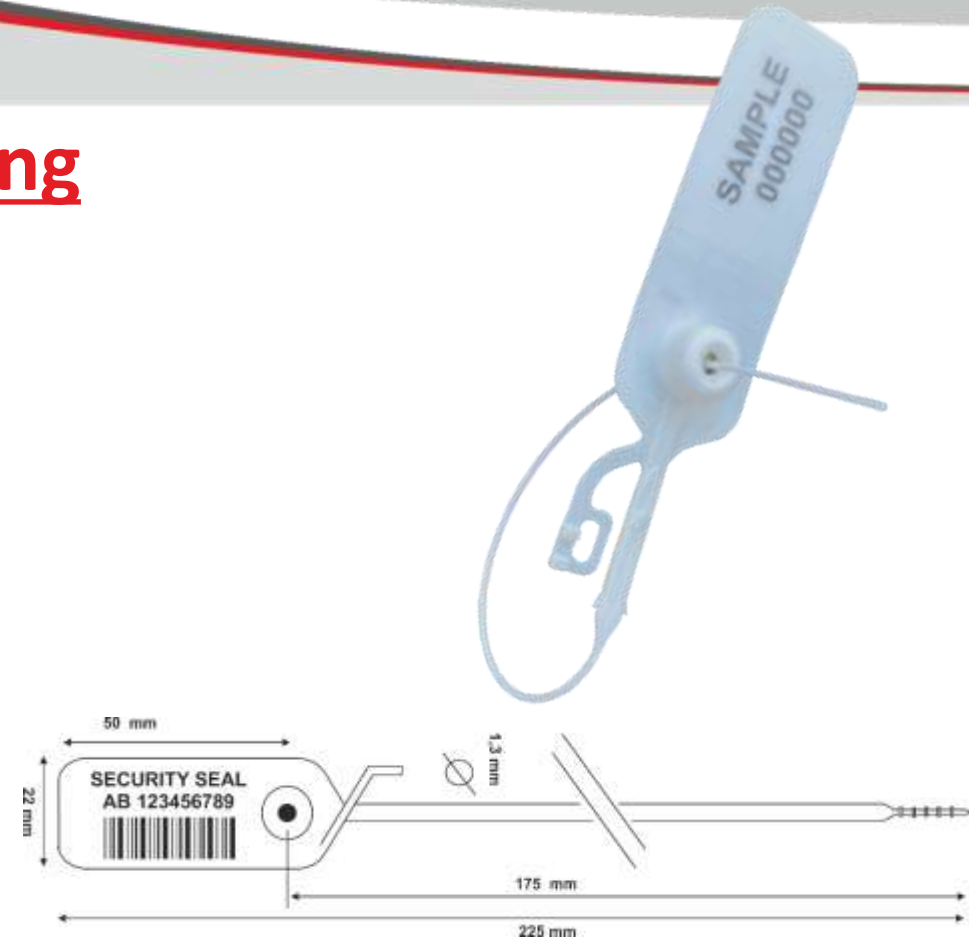


Arachneseal. Seals for tags



Description:

This type of seal for tags is designed to close and hold light weights. They are used for economic and short-term solutions. They are easily removable because their tensile strength is less than 6 kg. This PP (polypropylene) seal is very suitable for affixing maintenance tags for fire extinguishers and in all those cases where it is necessary to give information about a product.

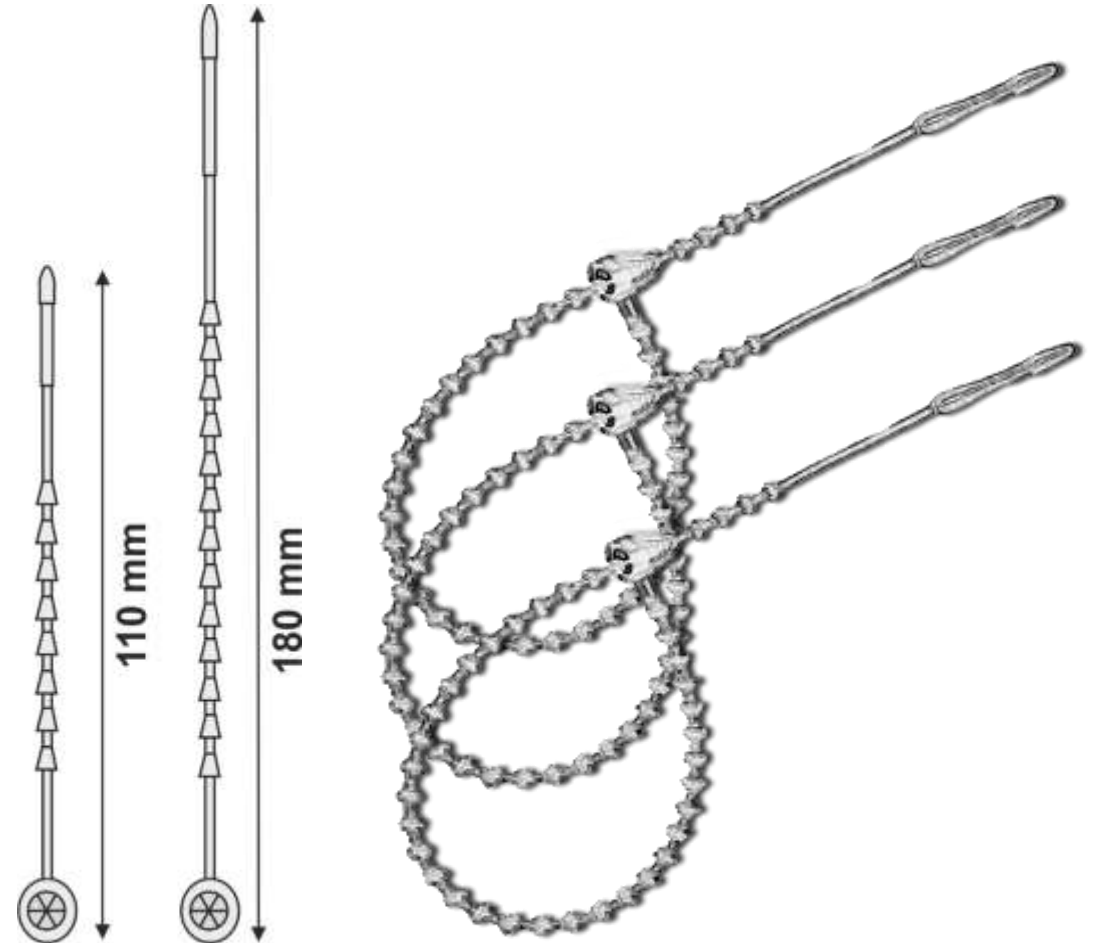

Cable ties. Self-locking (customisation upon request)

Material	Polyamide PA-6.6
Colour	Black or white
Working temperature	-25° & -40° up to +85° C
Tightening temperature	-10° up to +60° C
Melting point	+ 260°
Flammability rating	V2 acc- a UL 94
Resistance to chemical products	High resistance to bases, oils, greases, oil derivatives. Limited resistance to acids. Not resistant to phenols and to chloride solvents

Art: CABLE TIES

80x2,5 mm

100x2,5 mm

120x2,5 mm

150x3,6 mm

200x3,6 mm


(ask for general catalogue)



Frissoseal. Seal with numbering for emergency doors

LeghornGroup seals for emergency doors are all numbered and customizable.

They have an appropriate TENSILE STRENGTH, so that they can be easily broken if necessary. As for the FRISSOSEAL model for emergency doors, this model has a tensile strength of less than **80N as required by current regulations**. Upon request we can provide the certificate of tensile strength issued by Pisa University.

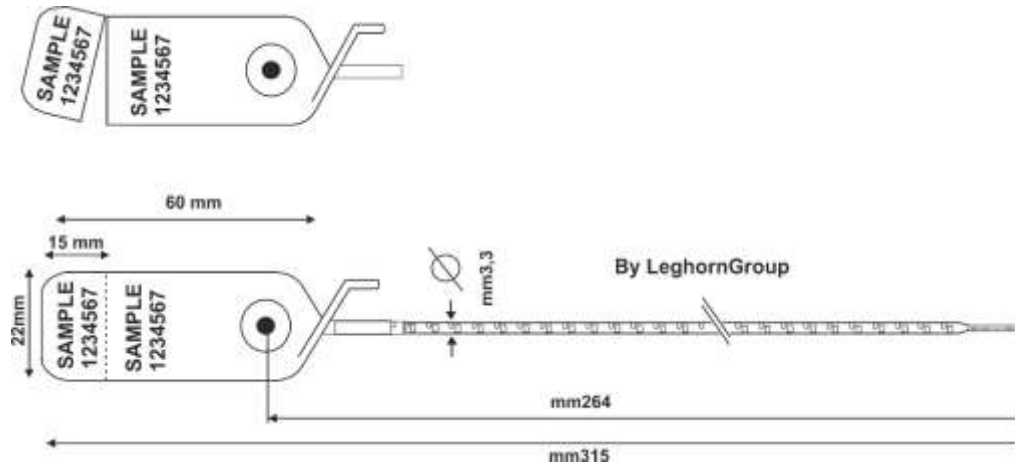



Ultra destructible security labels.




LeghornGroup has been an expert in tamper evident systems for 45 years.

In the field of security labels, ultra-destructible labels play an important role and will completely flake off in the event of a removal attempt.

We are also able to produce labels with very small dimensions: even a few millimeters of side or diameter.



“VOID” security labels with numbering
With residue

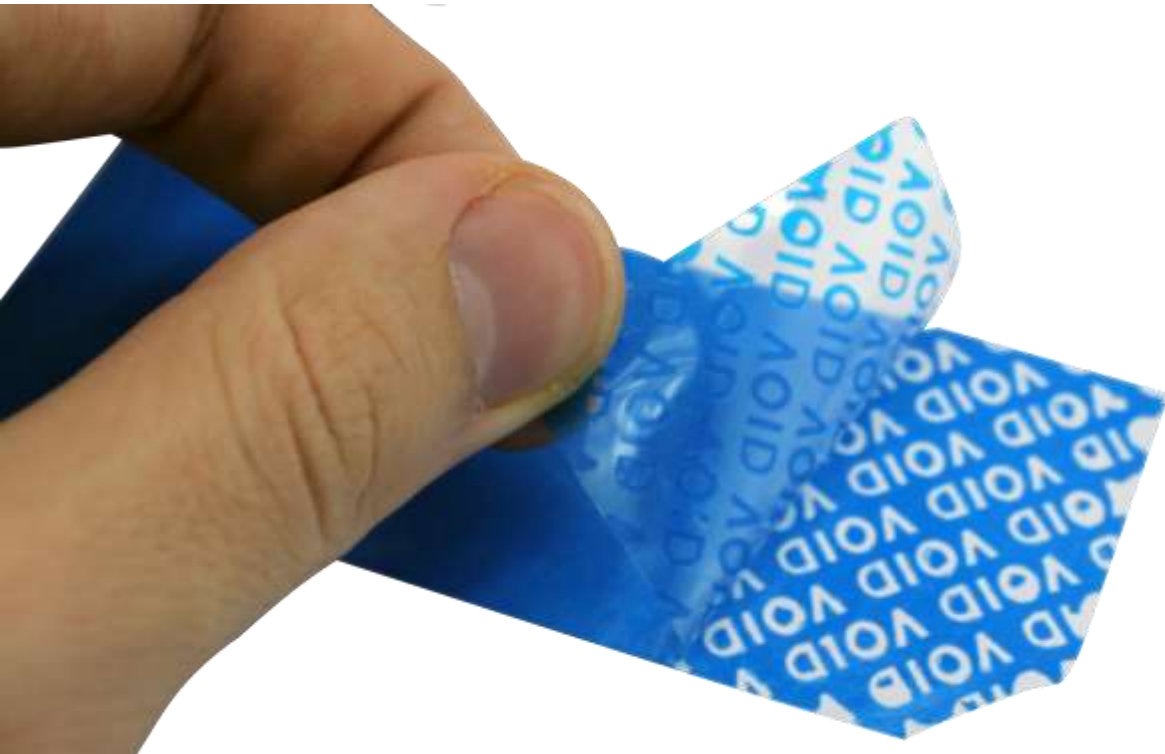

“VOID” security labels with numbering
Without residue

RFID: traceability check.

LeghornGroup s.r.l. supplies small and sturdy **RFID UHF** TAG designed to stick to curved metal surfaces.

This “metal tag” allows you to manage all the information relevant to the single fire extinguisher with the possibility to update this information whenever necessary.



Alert lock: electronic closure.

In case of UNAUTHORIZED access to large fire-fighting systems, ALLERT LOCK immediately sends a message on your mobile.



ALERT LOCK is battery equipped with more than 3 years of battery life.
(Ask for general presentation).



Protection - Control - Identification - Tracking - Rfid solutions

www.leghorngroup.com

FINDUS@

info@leghorngroup.com



LeghornGroup S.r.l.

34/36 Via degli Arrotini

57121 Livorno (LI) Italy

www.leghorngroup.com

info@leghorngroup.com

LeghornGroup – India
www.leghorngroup.in

LeghornGroup – Italy
www.leghorngroup.it

LeghornGroup – U.S.A.
www.leghorngroup.com

LeghornGroup – Belgium
www.leghorngroup.be
www.leghorngroup.nl

LeghornGroup – Czech Republic
www.leghorngroup.cz
www.leghorngroup.pl

LeghornGroup – Greece
www.leghorngroup.gr

LeghornGroup – Republic of
Moldova
www.leghorngroup.ro

LeghornGroup – España
www.leghorngroup.es